FERRAD KIT

Wound Beads

Six and eleven hole beads, in 43 material and 61 material, are available as beads and wound with tinned copper wire in several winding configurations.

- *Available materials: 43 and 61.*
- *Parts with a "1" as the last digit of the part number are supplied bulk packed. Parts 29 - - 666651 and 29 - - 666631 can be supplied radially taped and reeled per EIA Standard 468-B. This packing method will change the last digit of the part number to a "4".*
- *Wire used for winding is oxygen free high conductivity copper with a tin plating.*
- *For performance data on Wound Beads, see page 58 of section "How to Choose Ferrite Components for EMI Suppression".*
- *Beads are controlled for impedance limits only. They are tested for impedance using a Hewlett Packard HP 4193A Vector Impedance Meter for beads in 43 material and the HP 4191A RF Impedance Analyzer for 61 material beads.*
- *The Expanded Bead-on-Lead EMI Suppressor Kit (part number 0199000010) is available for prototype evaluation. See page 84.*

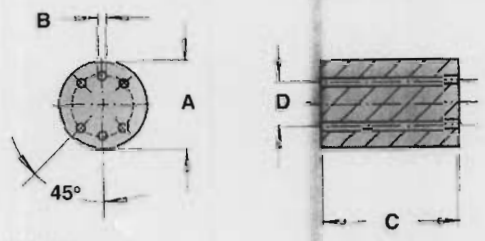

Figure 1

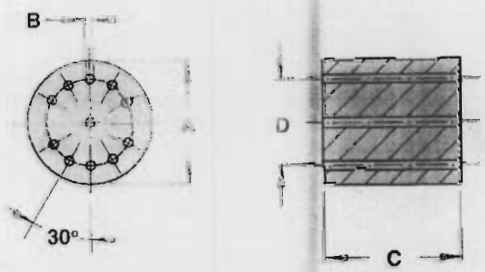

Figure 2

Figure 1-1



Figure 1-2



Figure 1-3



Figure 1-4



Figure 1-5



Figure 2-1



Figure 2-2

Dimensions *(Bold numbers are in millimeters, light numbers are nominal in inches.)*

Impedance (Ω)

Part Number*	Fig.	A	B	C	D_{Ref}	Wt (g)	43			61		
							10 MHz	50 MHz	100 MHz	50 MHz	100 MHz	200 MHz
26 - - 666611①	1	6.0±0.25 .236	0.75+0.15 .032	10.0±0.25 .394	3.5 .138	1.2	170 Min.	320 Min.	375 Min.	250 Min.	425 Min.	325 Min.
2643777711②	2	10.0±0.25 3.94	0.9+0.15 .038	10.0±0.25 .394	7.5 .295	3.3	300 Min.	725 Min.	400 Min.	–	–	–

① *Tested with 1½ Turns* ② *Tested with 2½ turns*

Part Number*	Fig.	Turns	Wire Size	Wire Length	Wt (g)	43			61		
						10 MHz	50 MHz	100 MHz	50 MHz	100 MHz	200 MHz
29 - - 666661	1-1	1½	0.53 24 AWG	38.0±3.0 1.500	1.3	170 Min.	320 Min.	375 Min.	250 Min.	425 Min.	325 Min.
29 - - 666651	1-2	2	0.53 24 AWG	38.0±3.0 1.500	1.3	240 Min.	520 Min.	480 Min.	525 Min.	600 Min.	300 Min.
29 - - 666671	1-3	2½	0.53 24 AWG	38.0±3.0 1.500	1.4	320 Min.	680 Min.	580 Min.	750 Min.	675 Min.	275 Min.
29 - - 666681	1-4	2 x 1½	0.53 24 AWG	38.0±3.0 1.500	1.4	170 Min.	320 Min.	350 Min.	325 Min.	425 Min.	300 Min.
29 - - 666631	1-5	3	0.53 24 AWG	38.0±3.0 1.500	1.4	400 Min.	800 Min.	550 Min.	950 Min.	825 Min.	250 Min.
2943777741	2-1	4½	0.65 22 AWG	38.0±3.0 1.500	3.8	750 Min.	1000 Min.	400 Min.	–	–	–
2943777721	2-2	2 x 2½	0.65 22 AWG	③	3.9	300 Min.	725 Min.	400 Min.	–	–	–

* *Insert desired material in 3rd & 4th digit positions.*

③ *Wire length of one winding is* ***38.0±3.0*** *(1.500). Wire length of second winding is* ***28.5±3.0*** *(1.125)*

Fair-Rite Products Corp.

PO Box J, One Commercial Row, Wallkill, NY 12589
Phone (914) 895-2055 • FAX (914) 895-2629
E-Mail: ferrites@fair-rite.com